


Amosteam LP

Low Pressure Steam Hose

Construction:

Tube	: EPDM, black, smooth
Cover	: EPDM, black, cloth finish
Temperature	: -40° C upto +164° C
Applications	: Recommended for use at refineries, chemical plants, shipyards, ships and for heavy duty industrial applications

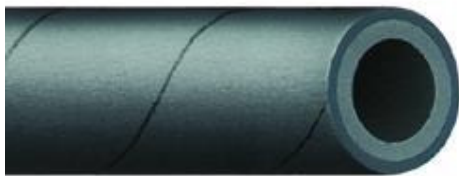

Technical data Amosteam LP

Inside Diameter	Outside Diameter	Working Pressure	Burst Pressure	Maximum Length
Inch mm	mm	Bar	Bar	Mtr
3/8" 10	21	7	50	40
1/2" 13	24	7	50	40
3/4" 19	33	7	50	40
1" 25	39	7	50	40
1.1/4" 32	47	7	50	40
1.1/2" 38	56	7	50	40
2" 50	68	7	50	40
2.1/2" 63	83	7	50	40
3" 76	98	7	50	40