

Bottom Loading Composite Hose


Recommended for use with bottom loading installations, special reinforcement for minimal elongation

Assemblies are fitted with swaged on TTMA flanges

Hose types

| Code | Service | Inner wire | Tube | Cover colour |
|---------|---------|---------------------|--------|--------------|
| 0104-GG | | Galvanized steel | PP | any |
| 0116-PG | Bottom | PP coated steel | PP | colour |
| 0114-SG | Loading | Stainless steel 316 | PP | on |
| 0124-SG | | Stainless steel 316 | Teflon | request |

Stainless Steel outer wire on request

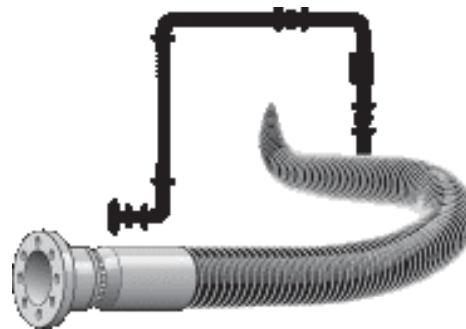

Technical data Bottom Loading

| Inside Diameter | | Working Pressure | | Min.Bend Radius | | Approx Weight | Maximum Length | |
|-----------------|-----|------------------|-----|-----------------|-----|---------------|----------------|-----|
| Inch | mm | PSI | Bar | Inch | mm | Kg/M | Ft | Mtr |
| 3" | 80 | 150 | 10 | 9,5 | 240 | 3,25 | 65 | 20 |
| 4" | 100 | 150 | 10 | 14,50 | 360 | 5,10 | 65 | 20 |

Safety factor 5 : 1