


Cristal Cord

PVC Airhose/Waterhose

Construction:

Tube	: PVC, transparant, smooth
Reinforcements	: Plies of crosslinked polyester
Cover	: PVC, transparent, smooth
Temperatur	: -20° C upto +60° C
Applications	: Air/water pressurehose, restricted chemical resistant Non toxix

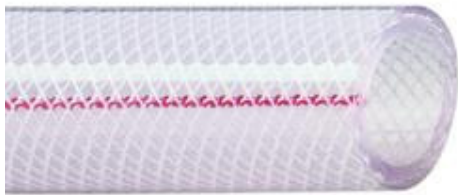

Technical data Cristal Cord

Inside Diameter Inch mm	Outside Diameter mm	Working Pressure Bar at 20°C	Burst Pressure Bar	Maximum Length Mtr
3/16" 5	11	25	60	50
1/4" 6	12	25	60	50
5/16" 8	14	20	60	50
9	15	20	60	50
10	16	20	60	50
1/2" 12	21	20	45	50
13	19	15	45	50
13	20	20	45	50
5/8" 15	21	16	45	50
16	24	15	30	50
3/4" 19	27	14	30	50
1" 25	34	11	30	50
30	38	10	30	50
1.1/4" 32	42	10	30	50
1.1/2" 38	48	8	30	50
2" 50	62	7	21	25