


Cristal Cord

PVC Perslucht & Waterslang

Konstruktie:

Binnenwand	: PVC, transparant, glad
Inlagen	: Kruislings gevlochten polyester
Buitenwand	: PVC, transparent, glad
Temperatuur	: -20° C tot +60° C
Toepassing	: Perslucht & Waterslang, beperkt chemicalien bestendig, gifvrij

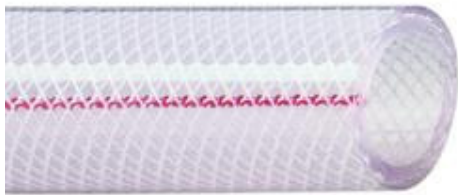

Technische gegevens Cristal Cord

Inwendige Diameter	Uitwendige Diameter	Werkdruk	Barstdruk	Maximum Lengte	
Inch mm	mm	Bar by 20°C	Bar	Mtr	
3/16"	5	11	25	60	50
1/4"	6	12	25	60	50
5/16"	8	14	20	60	50
	9	15	20	60	50
	10	16	20	60	50
1/2"	12	21	20	45	50
	13	19	15	45	50
	13	20	20	45	50
5/8"	15	21	16	45	50
	16	24	15	30	50
3/4"	19	27	14	30	50
1"	25	34	11	30	50
	30	38	10	30	50
1.1/4"	32	42	10	30	50
1.1/2"	38	48	8	30	50
2"	50	62	7	21	25